

ClearFog CN9130 Pro SBC


Quad Core A72, up to 2.2GHz



- SoC: Marvell CN913x 4 cores Arm Cortex-A72
- Memory: Up to 16GB 64 bit SO-DIMM DDR4 (not included by default)
- Storage: Optional eMMC (8GB by default)
- Temperature: Commercial (0C to 35C)
- OS: Linux



ClearFog CN9130 Pro	
I/O	1 x USB 3.0
Networking	1 x Port dedicated Ethernet 5 x Switched Ethernet RJ45 10/100/1000 1 x SFP
Processor	Marvell OCTEON based CN9130 Quad core Arm Cortex A72 up to 2.2 GHz
Memory & Storage	Up to 8GB DDR4 8GB eMMC MicroSD
Display	None
Misc.	Indication LEDs User Push Buttons RTC Battery JTAG Header Analog Audio/TDM module support
Development and Debug interfaces	Micro USB
Power	9V-32V Advanced Power Control Fan Control
Expansion card I/Os	mikroBUS header M.2 2 x mSATA/mPCIE with SIM holder
Temperature	Commercial: 0°C to 35°C
Dimensions	PCBA: 225 x 100mm Enclosure : 255 x 105 x 35mm
Enclosure	Extruded aluminum

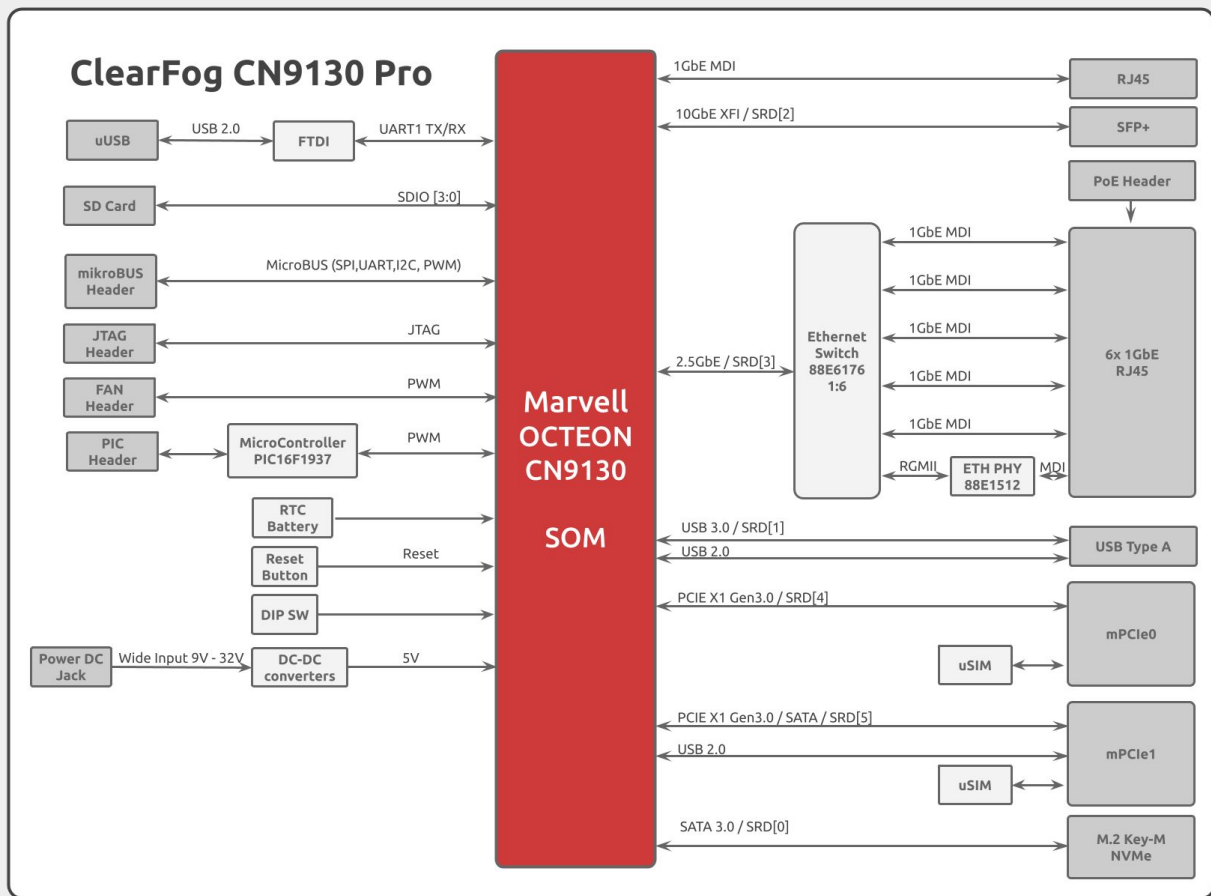

For Ordering information please [contact us](#)

- To choose your ideal configuration see our [Product Configurator Tool](#)

Accessories:

SKU	Description
PA00012	12V 1.5A US Power Adapter
PA00013	12V 1.5A EU Power Adapter
MSD016B	Micro SD 16GB

For more information about the ClearFog CN9130 Pro Software/Hardware visit our:

[Developer Center](#)