



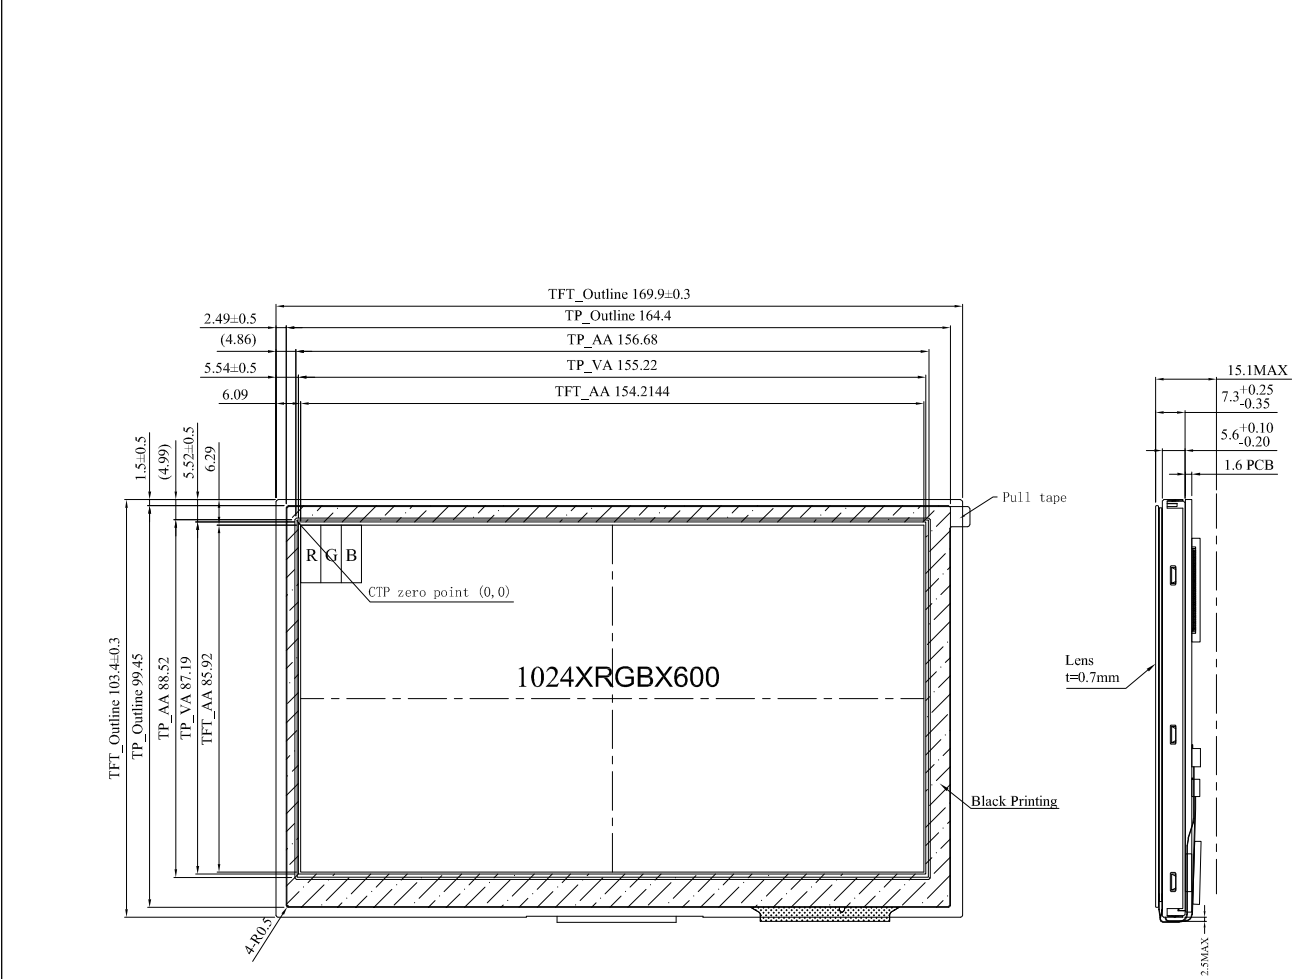

CON3

PIN NO	SYMBOL	PIN NO	SYMBOL	PIN NO	SYMBOL	PIN NO	SYMBOL
1	NC	11	D1N	21	D3P	31	VLED+
2	VDD	12	D1P	22	GND	32	VLED+
3	VDD	13	GND	23	GND	33	VLED+
4	NC	14	D2N	24	GND	34	NC
5	RESET	15	D2P	25	GND	35	CTP_SCL
6	STBYB	16	GND	26	NC	36	CTP_SDA
7	GND	17	CLKPN	27	LED PWM	37	CTP_/RST
8	D0N	18	CLKPP	28	L/R	38	CTP_/INT
9	D0P	19	GND	29	U/D	39	NC
10	GND	20	D3N	30	NC	40	NC

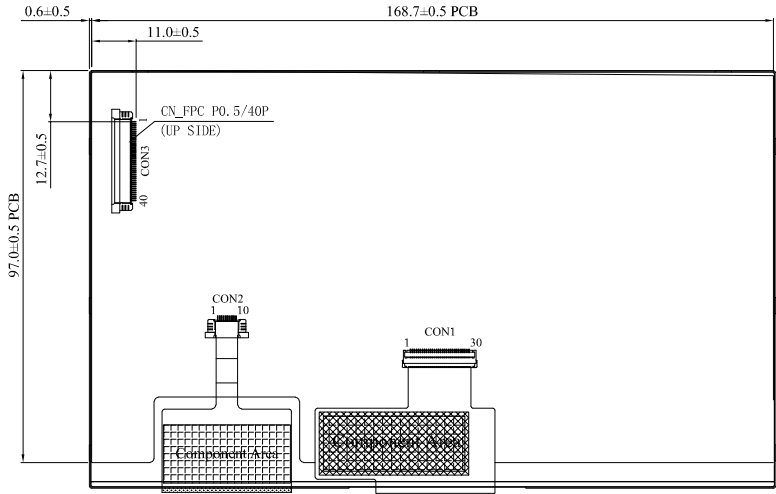

1	Lcd Type	TFT
2	Viewing Angle	85/85/85/85
3	Surface	Glare
4	Screen size	7.0"(diagonal)
5	Display format	1024 X RGB X 600
6	Operating Temperature	-20°C ~70°C
7	Storage Temperature	-30°C ~80°C
8	Active area	154.2144(W) X 85.92(H)
9	Pixel pitch	0.1506(W) X 0.1432(H)
10	Color arrangement	RGB-STRIPE
11	Brightness	400min. 450typ. cd/m2
12	CTP IC	ILI2130 or equivalent
13	CTP Resolution	16384*16384

The non-specified tolerance of dimension is ±0.3mm.

SCALE: 1/1	UNIT: mm	華凌光電股份有限公司 WINSTAR DISPLAY CO.
REV: 0	PAGE: 1/1	
APPROVE	梁榮智 2023/11/23	MODEL WJ70N3TYJHMNG0#
CHECK	蔡宜珍 2023/11/23	TITLE TFT MODULE
DRAW	LICO 2023/11/23	DWG NO. T-121179